

# FIRING LINES

## LT-100, LT-200 et LT-350



- Very robust
- Twisted cable NSN 6145-99-017-3378
- Safety sockets
- Shunt
- Brake
- Three sizes : 100 m, 200 m, 350 m

## FIRING LINES MOUNTED ON DRUMS

The firing lines consist of :

- twisted firing cable, colour black / brown, section 2 x 0,75 mm<sup>2</sup>, **NSN 6145-99-017-3378**
- a drum made of butyl rubber, very robust, black colour


These firing lines exist in 3 different lengths :

Reference	Length	Diam. of drum
LT-100	100 m	24 cm
LT-200	200 m	30 cm
LT-350	350 m	35 cm


### Front of the drum :

The front of the drum is fitted with two safety sockets (4 mm female) for connection of the exploder.

Two clip on lead safety plugs are also supplied for the connection on the two safety sockets.

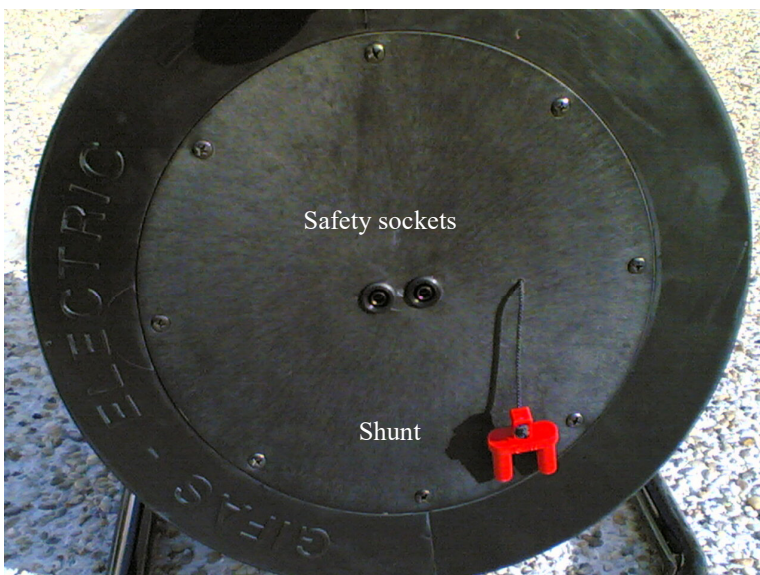

A shunt is also supplied with the drum and can be connected on the sockets, if the user wishes.



### Back of the drum :

The black knob located in the back of the drum is used to tighten the drum's brake.

Turning in the clockwise direction tightens the brake, while turning in the anti-clockwise direction releases the brake.

Warning : make sure that the brake is not tightened before to roll or unroll the firing line.

